

PUBLIK PLACE




**Jl. Muara Karang Blok L 9 Timur No 8 Pluit
Jakarta Utara 14450, Jakarta Utara 14450 DKI
Jakarta Indonesia
(021) 6679325
customer.care@niagara.co.id**



Spesifikasi Niagara UNG 319

Model	UNG 319
Purification System	<ol style="list-style-type: none"> 1. Front filter 5 micron (quick change model) 2. Active carbon filter (quick change model) 3. Sediment filter 1 micron (quick change model) 4. UV system 1 GPM
Production Capacity	Up to 1 GPM
Material	Stainless steel 304
Dimension	197 × 634 × 1,060 mm
Output	1 fountain faucet, 1 bottle faucet
Water Temperature	Warm
Inlet Pipe	1/2" pipe with ball valve & flexible hose
Minimum Inlet Pressure	1.5 bar
Outlet Pipe	3/4" pipe for drain
Electrical Connection	AC 220 V
Power Consumption	UV 14 watt


COMPACT SYSTEM RESIDENTIAL WATER FILTRATION

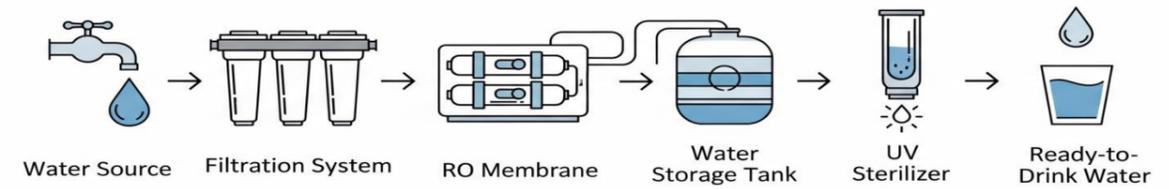

Fitur Utama :



Drinking Fountain Bubbler
Keran Minum Langsung



Stainless Steel Body
Kuat, Higenis dan Tahan Lama



Bottle Filling Pipes
Pipa Pengisian Botol



NIAGARA DRINKING FOUNTAIN UNG 319